

- (9) WARNING Check that the pram body or seat unit attachment devices are correctly engaged before use.
- (10) WARNING This product is not suitable for running or skating.
- (11) WARNING The maximum load of baby stroller is 15KGS ,The maximum load of basket is 2KGS . Please don't make them overload .
- (12) WARNING The backrest must be reclined to the lowest positon when stroller is used by baby under 6 month.
- (13) WARNING Don't add a mattress thicker than 25MM.
- (14) WARNING The parking device shall be engaged when placing and removing the children.
- (15) WARNING Any load attached to the handle and/or on the back of the backrest and/or on the sides of the vehicle will affect the stability of the vehicle.
- (16) WARNING This vehicle is intended for use by one child only.
- (17) WARNING Only replacement parts supplied or recommended by the manufacturer/distributor shall be used.
- (18) WARNING Don't use this stroller on uneven road or near stove.
- (19) WARNING Avoid to use or keep the stroller in wet , cold or hightemperature , and far away fire or strong heat .
- (20) WARNING Avoid serious injury from falling or sliding out,Secure the child in the harness at all the times.

AKARANA BABY®

Baby Stroller

HP712-TJ501




Parts



Installation


1. Assemblage of a pram

The lock levers

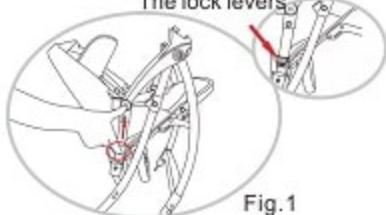


Opening the frame: Fig. 1 - use your fingers to lift the locks, which are located on both sides of the frame, upwards and the frame of the stroller will be unlocked. Fig.2 - then lay out the front and rear parts of the frame of the stroller in the directions indicated by the arrows until you hear a characteristic click, which means that everything is in order.

2. Install and take down the wheels




1. Install and take-down of front wheel group: insert the front wheel group into the cover core of front foot tube, when the barb of cover core of front wheel spring out, the installation is ok. If you need to take down the front wheel, just hold the barb and pull out the wheels, then the front wheel group will be taken down.

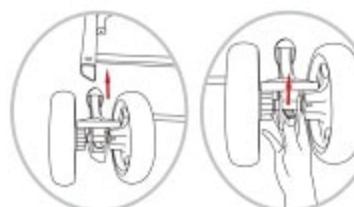



2. Install and take down of rear wheel group: forced the rear wheel group into the back foot tube, when the spring piece come out and lock is ok, Press down the spring piece and pull out the wheels, the rear wheel could be take down.

NOTICE: Hold and push the stroller to confirm if locked.

3. Install and take down the canopy

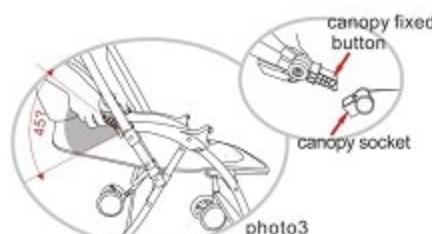


Install canopy: as photo3, inset the fixed button to canopy socket by 45 degree, then fix the lock as photo4. it's ok when hear "ka da".



Take down canopy: push up the canopy fixed button to take down the canopy.

4. Install&remove the handle bar



As shown in the figure, adjust the handle bar to vertical with the ground, then insert the end of the handle bar into fixture of both sides. When you hear a click sound it is installed properly. When remove the handle bar, first adjust the handle bar to vertical with the ground, then press the spring and pull out as shown in the figure.

5. Install and take down the food tray



install food tray:
insert down the food
tray,it's ok when
hear "ka da".




take down food
tray:push up the
food tray, and press
the lock key in the
same time.



use the food tray,
take down one side
of food tray, and
rotate 270 degree
for take baby out.

6. Install and take down canopy fabric



install the canopy fabric: insert the front
canopy plastic to the outside socket, the
middle plastic to the middle socket, and
the rear plastic to the inside socket, then
fix the lock. do the opposite way to take
down the fabric.

7. Adjust the backrest



Press the button down and up
to adjust the backrest.

8. Adjust the legrest



Press the two side button to adjust
legrest as the photo showed.


Note: when baby is in the stroller, pls be careful to do it.

9. Install the shopping basket




Fix the shopping basket on the frame
by Velcro.

10. Using the front and rear wheels




as photo 9,step on the brake
link to lock stroller, the
opposite way to open it.



As photo 10, push the fixed
button up and down the fix and
open the direction of the front
wheels.

Note: when stop the stroller, the rear brake
must be pressed down to lock it.

11. Using cotton cushion



Open the safety belt lock, and fix the cotton
cushion by safety belt.

12. Folding the stroller

Folding stroller: brake the
stroller, adjust the backrest
to the highest position and
close the canopy, then push
the lock key press the
folding button, and push
down the stroller, it's ok
when hear "ka da".




Important-keep these instructions for future reference

13. Use the 5-point safety belt

⚠ Warning: Ensure the child in the safety belt at all the times when sit in it.



1. Buckle the four belts, then insert to the middle button, it's locked when hear "ka da".




2. Press the button in the middle of safety buckle to open it.




3. Adjust the shoulder belt and the waist belt to a more comfortable position.

14. Install car seat on stroller



Put connector into the right position of side armrest.



Put the car seat into the connector.

Maintenance and Care :

1. Avoiding to hurt baby, pls check and upkeep the stroller regular. Do not put the fabric in water for a long time, cleaning the fabric by soft hairbrush and other parts by soap or neutral detergents.

2. Pls check if have loose screw, broken parts or suture line regular. If necessary, pls change the broken parts. pls read this instruction carefully before using it.

3. When open the package, would have smell of EVA, it's ok, no harm to baby. you can put outside for several days.

⚠ WARNING : Far away from fire !

- (1) **WARNING** Please read this instructions carefully before you use this baby stroller and keep it well for reference. It may bring harm to children if you do not follow instructions.
- (2) **WARNING** Never leave your child unattended. It may be dangerous to leave your unattended.
- (3) **WARNING** Ensure that all the locking devices are engaged before use.
- (4) **WARNING** To avoid injury ensure that your child is kept away when unfolding and folding this product.
- (5) **WARNING** Do not let your child play with this product.
- (6) **WARNING** Use a harness as soon as your child can sit unaided.
- (7) **WARNING** This seat unit is just suitable for baby from 0-36 months.
- (8) **WARNING** Always use the restraint system.

MAINTAIN AND CARE OF YOUR PRODUCT

REMOVE (CLEAN) THE COVER

The cover can be easily removed for washing. Remove harness by pressing the harness and loose the shoulder straps to release buckles; then remove the cover to wash in warm water.

Follow reverse of the above to replace the cover.

CLEANING THE CAR SEAT

The harness and plastic parts can be washed with very mild detergent and warm water. Do not use chemical cleansers, bleach or corrosives to wash any part of the car seat.

INSTRUCTIONS FOR USE

CHILD CAR SEAT GROUP 0+

SUITABLE FROM BIRTH – 15 MONTHS

SUITABLE FROM APPROXIMATELY 0 TO 13KG



1. This is a "Universal" child car seat; it is approved to ECE Regulation 44.04 for general use in vehicles and will fit most vehicle seats.
2. The best fit is if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting this "Universal" child restraint for this group.
3. This child restraint has been declared "Universal" under more strict conditions than those applied to earlier designs which do not carry this notice.
4. If you are in doubt, please consult either the child restraint manufacturer or the retailer.

Only suitable if the vehicle is fitted with 3-point static, 3-point retractor safety belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

WARNING

DO NOT place rear-facing child seat on front seats with airbags.

Contents

| | |
|---|----|
| NOTES | 2 |
| SAFETY WARNINGS | 3 |
| PARTS AND INTERIOR EQUIPMENT | 4 |
| ADJUSTING THE SHOULDER HEIGHT | 5 |
| THE ADJUSTMENT AND USE OF HARNESS | 5 |
| SECURING THE INFANT CARRIER | 7 |
| SNAPPED THE HANDLE | 8 |
| CANOPY ASSEMBLY | 10 |
| MAINTAIN AND CARE OF YOUR PRODUCT | 11 |

NOTES

1. Please read through these instructions carefully before using the baby car seat for the first time. The instructions can be retained on the baby car seat for reference in its life period.

Applicability:


The baby car seat is suitable for weight categories 0+, (No older than approx. 15 months).



WARNING

DO NOT place rear-facing child seat on front seats with airbags.


2. Your child seat can only be installed rearward facing (in the direction opposite the one in which you are travelling) with a lap and diagonal seat belt passenger seats.

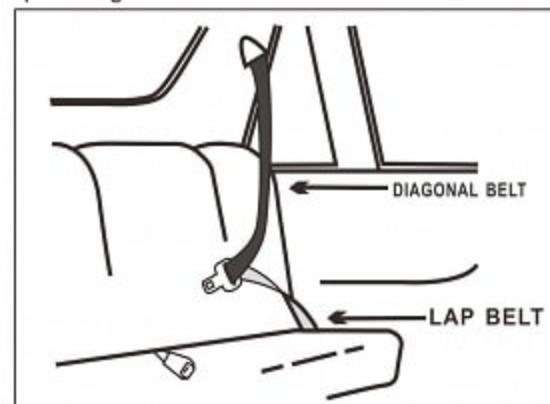

SAFETY WARNINGS

1. The instructions can be retained on the baby car seat for its life period.
2. This baby car seat can only be installed using a three-point vehicle belt.
3. Do not use this child restraint on a passenger seat equipped with an airbag under any circumstances.
4. Do not leave your baby unattended in the seat at any time.
5. Vehicle rear seat installation baby basket is the most secure position for the baby car seat.
6. Do not use the child seat without fastening the child's harness correctly, and never use it without fastening it into the car as following these fitting instructions. Before each journey, check whether the baby car seat is installed firmly.
7. Do not modify this product in any way. Not to use any load bearing contact points other than those described in the instructions and marked in the child car seat.
8. The handle of the baby car seat has to against the back of the vehicle seat. If necessary, adjust the head rest of the vehicle seat.
9. The baby car seat must not be used without the cover. And the seat cover should not be replaced with any other than the one recommended by the manufacturer.
10. Protect the baby car seat system against direct sun light otherwise the high temperature will hurt your child.
11. Ensure that all parts are locked in place correctly and not panned in the adjustable seats or doors.
12. Luggage and other heavy objects should be put safely in the car. Loose objects are liable to cause injury in the event of an accident.
13. Never use the seat as a shopping bag or as a means for transporting something.
14. Periodically inspect the harness, pay particular attention to attachment points, stitching and adjusting devices
15. When the child seat is not used, it is fastened into the car with a seat belt to avoid it being thrown out of the car in an accident.
16. In the event of an emergency, it is important to release the child quickly. This means that the buckle is not fully tamperproof and therefore your child should be persuaded never to play with the buckle.
17. Do not continue to use the baby car seat if parts have become damaged or have loosened after an accident.
18. After accident, the child car seat should be changed.

PARTS AND INTERIOR EQUIPMENT


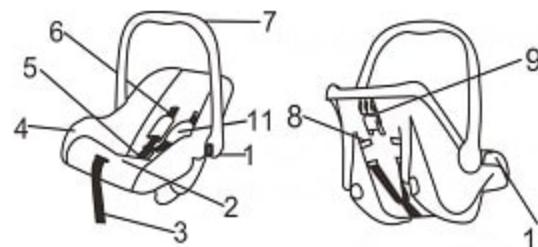


TJ-501 parts drawing



HXTJ-501 parts drawing

| | | | |
|---|--------------------------------|----|---------------------------------|
| 1 | Red Button Handle Adjuster | 8 | Shoulder Harness Slots |
| 2 | Harness Adjuster under "Press" | 9 | Diagonal Belt Guide |
| 3 | Harness Adjuster Strap | 10 | Light Blue Lap Belt Guide |
| 4 | Cover | 11 | Chest pad |
| 5 | Harness Buckle | 12 | HXTJ-501Carry Handle (Aluminum) |
| 6 | Shoulder Straps | 13 | HXTJ-501 Handle fixer |
| 7 | TJ-501 Carry Handle (Plastic) | 14 | ECE-mark |



Certificate NO.
serial NO.

Note: only handle material is different between TJ501 and HXTJ501, the usage method and the function are same (No special labeling on the figure which are universal parts).

ADJUSTING THE SHOULDER HEIGHT

The harness has 2 positions. The straps should go into the slots at, or the nearest slots above the height of the child's shoulders.



THE ADJUSTMENT AND USE OF HARNESS

If the height of your shoulder belts in child car seat is not fit for your child, Adjust the height of the shoulder belts, please proceed as follows:



Step 1: loosen the shoulder harness
(see point Below).

Step 2: Pull out the buckle tongues from the chest pad and the slots on the cover and the shell, then thread them into the corresponding belt slots.

Ensure that both of the shoulder belts go through slots at the same height, and not twisted.

1. Loosening the shoulder straps



Step1. The shoulder straps are slackened by pressing the lever (under the seat cover) on the front of the seat.

Step2. Press down on the label marked "Press" as you grip the two shoulder straps with your other hand. Pull the shoulder straps towards you to loosen it.

2. Securing the baby with the harness



Firstly, adjust the shoulder straps height(see point ADJUSTING THE SHOULDER HEIGHT), proceed as follows:

Step1. Loosen the harness(see point above), open the buckle, and place them down sideways. Seat your child in the child car seat. Place both shoulder straps over your child's shoulders.

Step2. Put the two metal sections of the buckle connectors together (fig. 1), Slot the two buckle connectors into the slot in the top of the buckle until they "click" into place(fig. 2)

Check the harness is correctly locked by pulling the shoulder straps upwards(fig. 3).

3.Tighten the shoulder harness



Pull the shoulder straps upwards to remove the whole harness then pull the adjuster strap until the harness is fully tightened (fig. left).

The harness should be adjusted as tightly as possible without causing discomfort to your child.

To release the harness (see point ADJUSTING THE SHOULDER HEIGHT), press the red button on the buckle downwards.

SECURING THE INFANT CARRIER

Please read the operating handbook in your vehicle to inform yourself about the basics concerning children's seats in vehicles.

DO NOT place this baby seat on seats with front airbags.

This baby car seat can only be installed using a three-point vehicle belt.

The baby car seat must be installed rearwards facing (in the direction opposite the one in which you are traveling).


Make sure all the belts' position is right and they have not become twisted. Also check that the cover is not impeding the movement or fit of the belt webbing in any way.

To release your baby car seat following the above instructions in reverse order.

SNAPPED THE HANDLE



The handle for the baby car seat can be snapped into 4 stable positions. To adjust the handle, please press the red button of handle on both sides at the same time. now it can be rotated.

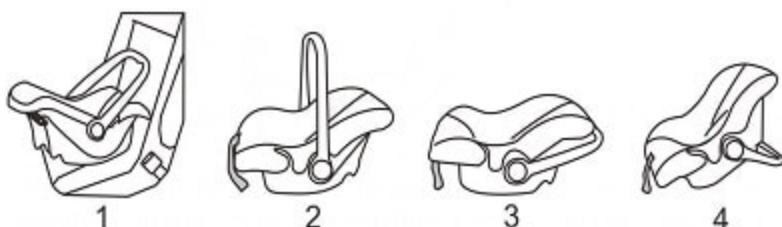

The carry handle has four positions:

1. Forward facing Installed in the car. This position (only this position) is suitable for the baby car seat installed on the vehicle seat.
2. Straight up for carrying
3. Handle clicked back to initiate the rocking feature
4. Down to support baby for feeding and play

Ensure that the handle is locked in a position, the harness is correctly fitted and the buckle fastened before carrying your car seat.



Fig. 1

Step 1. Adjust the handle to the forward position (Fig. 1). Put the seat in car's seat. Handle must be firmly against the backrest of car's seat.



Fig. 2

Step 2. Slide the lap belt of the Vehicle's 3-point seatbelt through both Lap belt guides. Let the tongue plate snap in the belt lock with a clearly audible "click". Pull the shoulder belt in narrow direction to tighten the lap belt. Check to make sure the tongue plate is locked by pulling on the belt(Fig. 2).



Fig. 3

Step 3. Place the diagonal belt in the diagonal belt guide at the back of the seat(Fig. 3).



Fig. 4


Step 4. Tighten the vehicle's own 3-point seatbelt by pulling hard on the positions showed in fig. 3 and fig. 4.



Fig. 5

Step 5. The satisfactory position of the adult safety-belt buckle relative to the child car seat is as the Fig 5. You can contact the child car seat manufacturer if in doubt about this point.

CANOPY USE

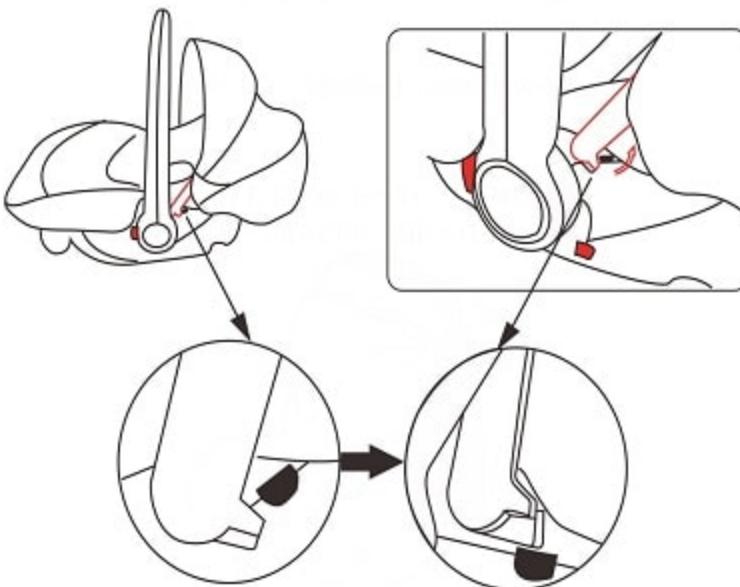

Depend on the elastic deformation, Insert keys on both ends of canopy frame can be up-down adjusted. When you heard the "click", the side of canopy frame should be locates.